



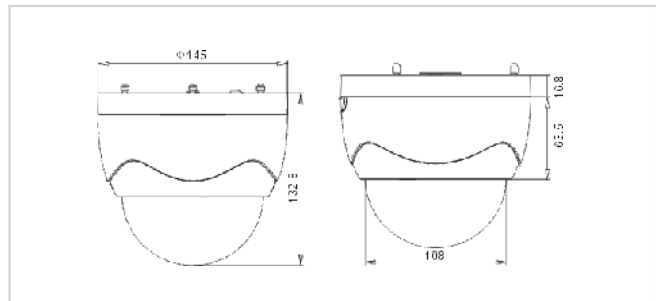

DS-2CD752MF-E 2.0 Megapixel IP Dome Camera

- Linux OS embedded
- TI DaVinci hardware compression
- High resolution video preview: 1600×1200 pixels
- H.264 dual stream real time video compression in HD720P/4CIF/DCIF/2CIF/CIF/QCIF
- SDHC card local storage
- Support IE client for network preview

Unit: mm

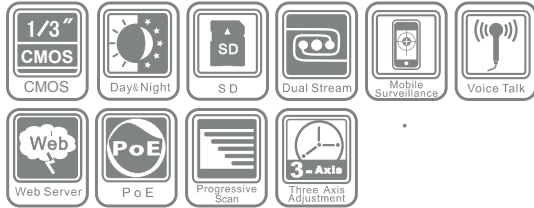

Specifications

		DS-2CD752MF-E
Camera	Image Sensor	1/3 inch CMOS
	Effective Pixels	1600 (H) × 1200 (V)
	Min. Illumination	0.5Lux @ F1.2; 0.1Lux @ F1.2, sense up × 5
	Day&Night	Electronic
	Lens	2.8 ~ 11mm, F1.4 manual Iris lens
Compression Standard	Video Output	1Vp-p Composite Output (75Ω/BNC)
	Video Compression	H.264
	Video Bit Rate	32 K ~ 2M, adjustable (8Mbps maximum)
Image	Audio Compression	OggVorbis
	Max. Image Resolution	1600 x 1200
Functions	Frame Rate	12.5fps (1600 x 1200), 25fps (1280 x 720), 25fps (704 x 576), 30fps (704 x 480)
	ePTZ	Support
	Motion Detection	Support
	Dual Stream	Support
	SD Card Local Recording	Support
	Heartbeat	Support
	Password Protection	Support
Interface	Protocols	TCP/IP,HTTP,DHCP,DNS,RTP/RTCP, PPPoE (FTP, SMTP, NTP, SNMP addible)
Interface	Audio Input	1 channel (2.0 ~ 2.4Vp-p,1kΩ)
	Audio Output	1 channel (Line level, 600Ω)
	Communication	1 RJ45 10M / 100M self-adaptive Ethernet port and 1 RS-485 interface
	Alarm Input	1 channel signal input
General	Alarm Output	1 channel signal relay output
	Power Supply	12VDC, ±10%, (-E) series support PoE (Power over Ethernet)
	Power Consumption	4W MAX
	Working Temperature	-10°C ~ 60°C
	Dimensions	Φ145 × 132.8 (Φ5.75" × 5.26")
	Weight	900g (1.98lbs)